



L-band Hybrid Coupler


for nanosatellites applications

ABOUT

WiRan 90° Hybrid Couplers allow for easy and reliable splitting of an input RF signal equally between two output ports with a 90 degree phase shift. Can also work in reverse, combining 90 degree phase shifted signals.

FEATURES

- small dimensions, perfect for compact satellites
- excellent phase & amplitude balance
- low insertion loss & VSWR
- high isolation
- high power handling

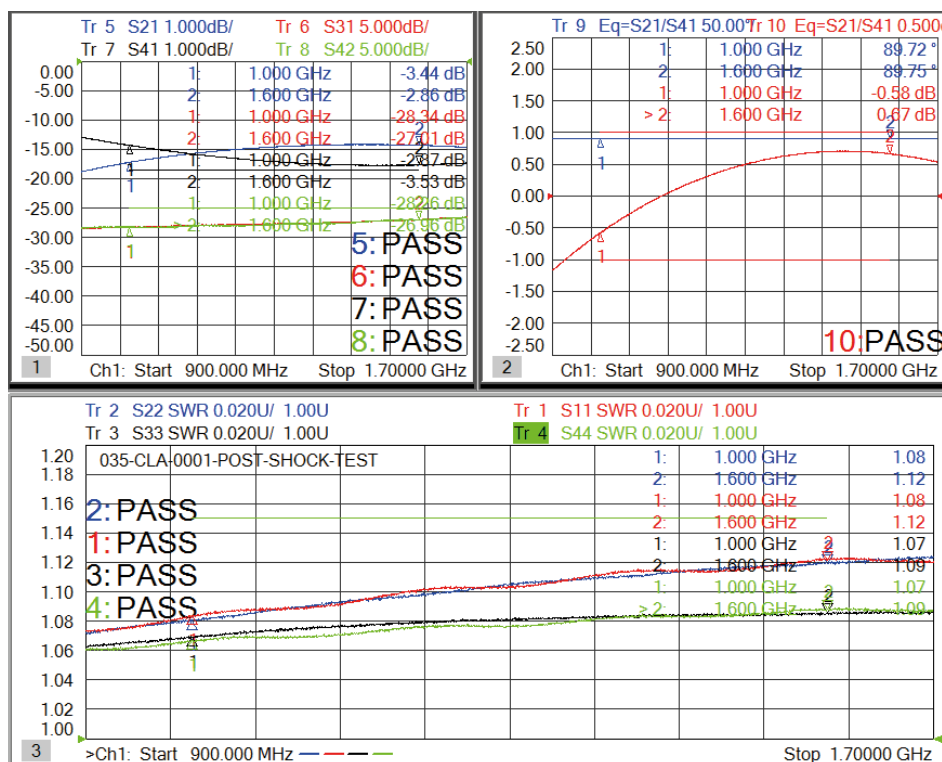

S-Parameters available on request.

WiRan sp. z o. o.

Al. Zwycięstwa 96/98, 81-451 Gdynia

NIP 9581424107

+48 58 663 10 10

info@wiran.pl

www.wiran.pl






L-band Hybrid Coupler

for nanosatellites applications

Parameter	Value	Unit
Frequency Range	1000-1600	MHz
Insertion Loss	≤0.4 (above nominal split)	dB
Return Loss	≥20	dB
Isolation	≥23	dB
Nominal Split	3.01±0.3	dB
Amplitude Balance	≤±0.5	dB
Phase Balance	≤±3	°
Power Handling *	≤30	Watt
Impedance	50	Ω
Port Connectors	SMA female connectors	
Operating Temperature	-75÷ +90	°C
Weight	60	g

* for altitude 1<h<100km - 7,5W (corona limited)

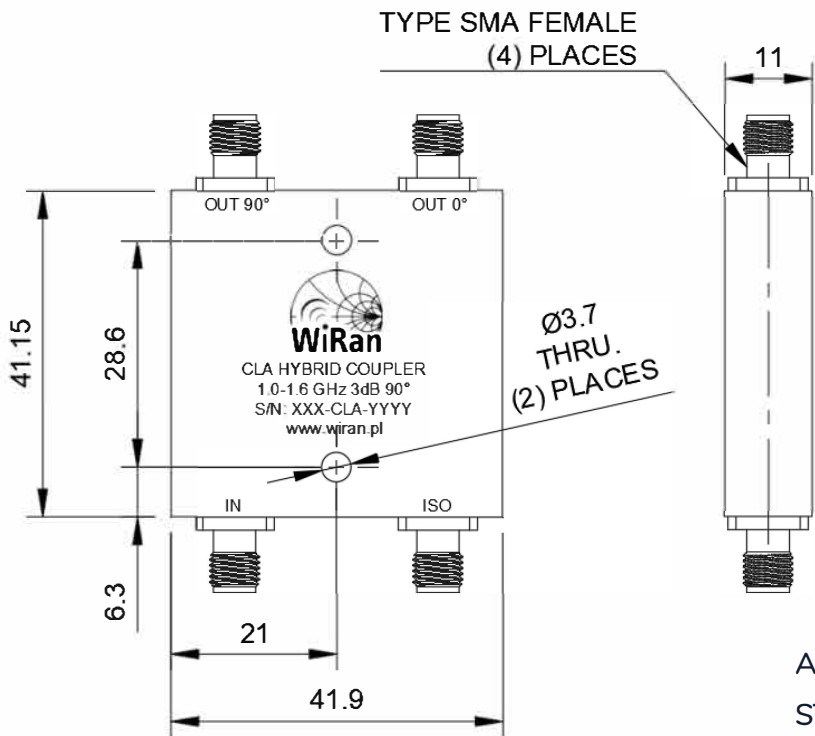

All values in mm.
STEP files available on request.

Ordering code	Description
CLA	L-band hybrid coupler 1000-1600 MHz, CubeSat compatible