

High-Speed Satcom on the Move



Access satellite broadband without stopping to configure bulky equipment with the network-agnostic, high-throughput ThinSat 300 for comms on the move.

Applications

- Broadcast Media
- Homeland Security
- Intelligence/Surveillance
- Disaster Recovery
- Emergency Management
- Oil and Gas Operations




ThinSat 300

Key Features

- Tracks satellites at any vehicle speed
- Compatible with wide-beam and HTS Ku-band services
- Seamless operation on GSO networks
- Supports broadcast-quality streaming
- High spectral efficiency (up to 2 bits/Hz)
- Mounts on standard vehicle roof racks
- Qualified for operation on Intelsat Flex networks
- Discreet, ultra-low profile at only 4.3" high

TECHNICAL SPECIFICATIONS

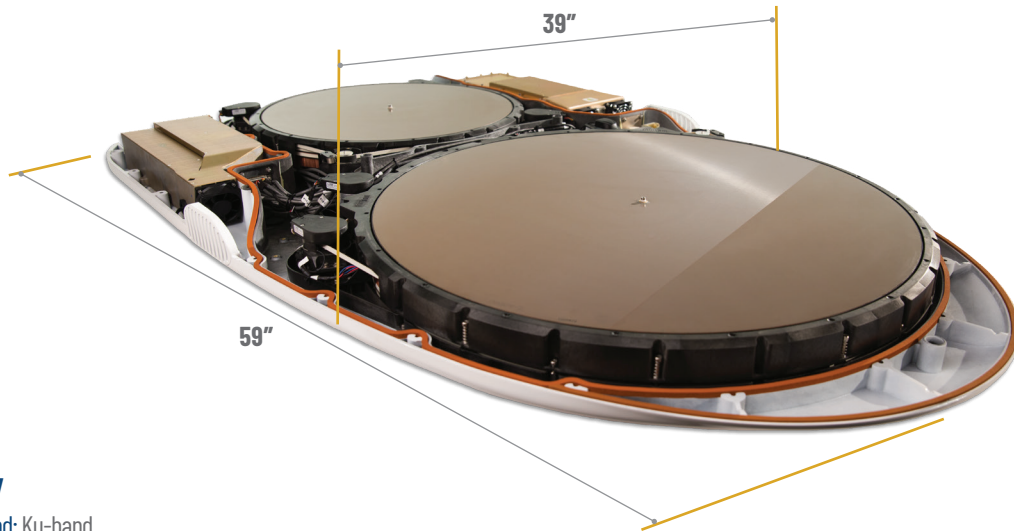

ThinSat 300

Compatibility

Operating Band: Ku-band

- Tx: 13.75 to 14.50 GHz
- Rx: 10.70 to 12.75 GHz

Constellations: GSO

Satellite Services: Agnostic; inquire for specific network certifications

Tracking and Agility

Initial Acquisition: 60 seconds (cold start)

Re-acquisition After 3-minute Blockage: <1 second

Azimuth Coverage: 360° continuous

Elevation Coverage: +10° to +90° (network dependent)

Beam Agility: >300°/sec

Tracking Accuracy: <0.2°

Mobility: Maintains connectivity at highway speeds

Throughput and Performance

Data Rates: HD backhaul capable (up to 10 Mbps)

G/T: 13 dB/K (8 dB/K at 20° elev.)

Network Efficiency: Up to 2 bits/Hz

EIRP: 51 dBW (46 dBW at 20° elev., 25 W Psat SSPB)

Polarization: Tracking linear (co-pol or orthogonal-pol)

X-pol Isolation: 30 dB typical

BUC

Integrated: 25 W BUC

Optional: External, higher-power amplifier up to 100 W (Plin)

Power

Input Power: 110 VAC/60 Hz or 220 VAC/50 Hz

Max Power: 600 W

Dimensions and Installation

Dimensions: 59"L x 39"W x 4.3"H

Weight: 120 lbs.

Installation: Mounts on standard vehicle roof racks

Environmental

Operating Temperature: -30°C to +60°C

Storage Temperature: -40°C to +70°C

ThinKom

www.thinkom.com

4881 West 145th Street, Hawthorne, CA 90250 USA

1.310.371.5486

© 2022 ThinKom Solutions, Inc. All rights reserved. ThinKom Solutions reserves the right to make changes in its products or specifications at any time and without notice. All trademarks indicated as such herein are trademarks of ThinKom Solutions.

© Reg. U.S. Patent and Trademark Office.

TS300Rev 03/22